


SCFW-6.5

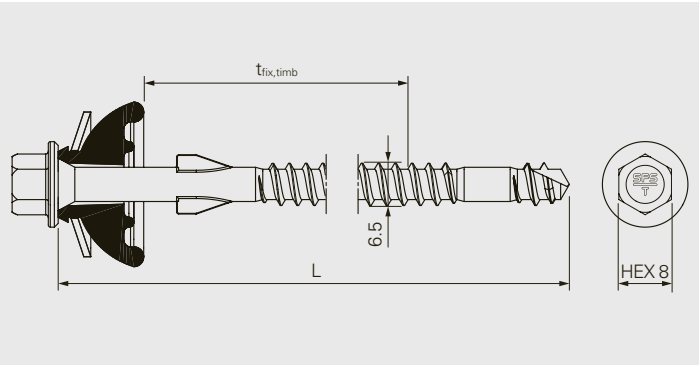

Description

Selfdrilling fastener made of carbon steel with shank wings and BAZ sealing element

Application

Fastening of corrugated fibre cement boards onto timber

Component 1 (t _i)		Component 2 (t _{ii})	
Fibre cement	6.5	Timber	$l_p \geq 50$
Fibre cement	2x6.5		

Fastener material

Carbon steel, hardened, Durocoat® 12 cycles kesternich
BAZ sealing element: Austenitic stainless steel A2, EPDM-seal

Approvals




Features and Benefits

- Threaded drill point for fast and smooth installation
- Easy drilling through overlaped fibre cement boards
- No stresses at fibre cement board by widening of the through hole
- Reduced splitting tendency in timber
- High corrosion durability by hot-dip galvanic coating
- High quality EPDM-seal with long durability

All measures in mm


All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.



Fastener in carbon steel

Product code	PU	L	t _{fix, timb}	
SCFW-BAZ-6,5×95	100	95	0–35	1664073
SCFW-BAZ-6,5×130		130	0–70	1506552

Please refer to the “Definition of clamping range and fixing thickness” in the technical introduction for definitions and diagrams related to t_{fix, timb}.



Accessories

Product description	PU	Insert drive	Recess	L	
SOK-IT-¼"-57-8Nm	1	HEX¼"	HEX8	57	1667322
Socket E308-¼"-50				50	1646160

All measures in mm

All information is non-binding and without guarantee. Before using the products, all specifications and calculations must be checked by a suitably qualified person and local regulations must be observed. This document is subject to revision. We reserve the right to make technical changes.